


ECOBULK
int. butterfly-valve, ETFE-g. / Wood-skidpallet (HT-F)

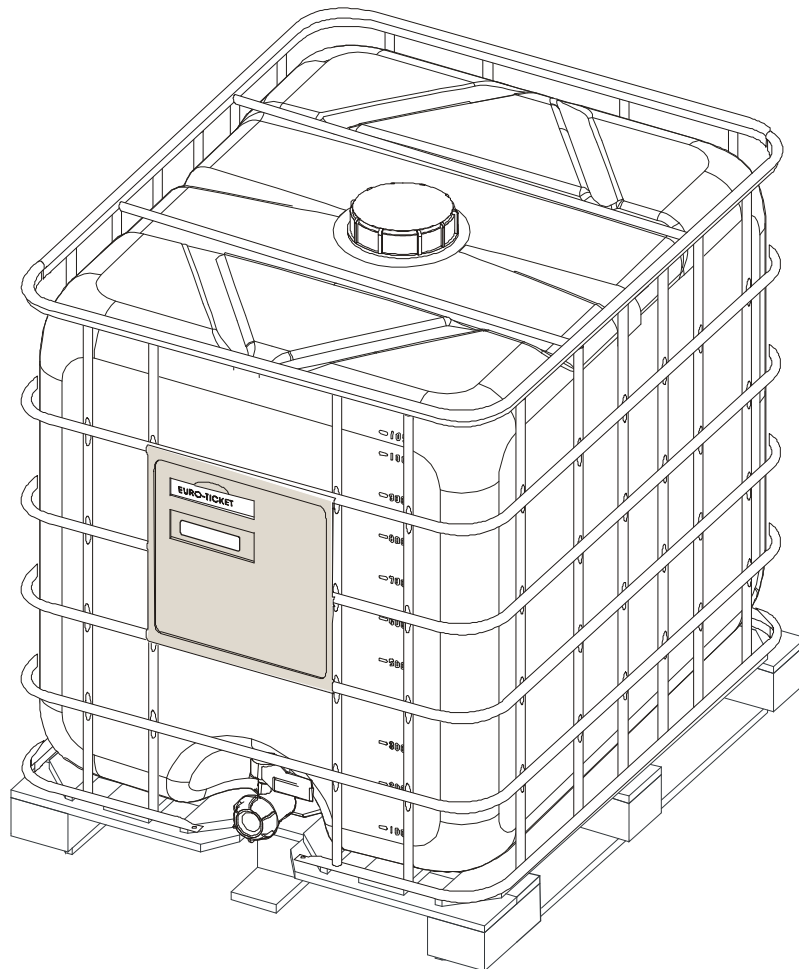

Technical data:

Nominal Capacity :	1000	Litre
Brimful Capacity :	1060	Litre
Length :	1200	mm
Width:	1000	mm
Height with pallet :	1160	mm
Filling opening :	225	mm
Discharge opening :	50	mm
Fork opening :	95	mm
Label plate :	1	piece
Weight :	Inner container :	14,0 kg
	Total approx :	62,5 kg

ECOBULK
int. butterfly-valve, ETFE-g. / Wood-skidpallet (HT-F)

Construction:

Outer Container: Rectangular grid box made of tubular Steel material, connected on top with tie-bar, label plate with Schütz-Ticket on front side.
Material: Steel, galvanized

Inner Container: Rectangular blow molded tank of high density polyethylene, with filling opening in the middle of the top section.
Material: PE-HD, natural
Discharge opening at the bottom of the front side.

Filling Opening: DN225 with external thread, closed with screw cap and gasket.
Material: Screw cap DN225: PE-HD, black
O-ring gasket: Cellular rubber

Discharge Opening: Integrated butterfly-valve DN50 with blue handle. Outlet sealed with an PE-lined Alu-film. Valve closed with screw cap, PE-disk and flat-gasket.
Material: Outlet nozzle enclosed.
Butterfly-valve housing: PE-HD, natural
Flap-gasket: ETFE
Screw cap DN50: PE-HD, black
Flat-gasket screw cap: PE, foam
PE-disk: PE-HD, red
Outlet nozzle: PE-HD, natural

Pallet: Wood-skidpallet (1000 x 1200 mm), 4-way entry
Material: Wood => Heat treatment (HT-F) acc. IPPC (ISPM 15)

Heavy metals: Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100ppm

Delivery: Ready for filling